

10/530534

JCO6 Rec'd CT/PTO 06 APR 2009

Express Mail Label #EV582717978US

#2

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

IN RE APPLICATION OF: ULRIK SKOVGAARD RASMUSSEN

FOR: CONFECTIONERY DISPENSER

CLAIM FOR PRIORITY

The Commissioner of Patents
P.O. Box 1450
Alexandria, VA 22313-1450


Dear Sir:

Applicant hereby claims the benefit of the filing date of 7 October 2002 of European Patent Application No. 02079198.4 under the provisions of 35 U.S.C. 119 and the International Convention for the Protection of Industrial Property.

If any fees are due with regard to this claim for priority, please charge them to Deposit Account No. 06-1130 maintained by Applicant's attorneys.

Respectfully submitted,

CANTOR COLBURN LLP

By: 

Daniel F. Drexler
Registration No. 47,535
CANTOR COLBURN LLP
55 Griffin Road South
Bloomfield, Connecticut 06002
Telephone: 860-286-2929
Facsimile: 860-286-0115
Customer No. 23413

Date: April 6, 2005



Europäisches
Patentamt

European
Patent Office


Office européen
des brevets

Rec'd PCT

10/530534

06 APR 2005

#2

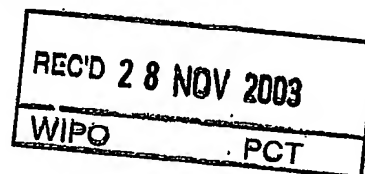

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02079198.4

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk



Anmeldung Nr.:
Application no.: 02079198.4
Demande no:

Anmeldetag:
Date of filing: 07.10.02
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

DANDY A/S
Dandyvej 19
7100 Vejle
DANEMARK

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

Confectionery dispenser

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

G07F/

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SK TR

CONFECTIONERY DISPENSER**Field of the invention**

The invention relates to a confectionery article dispenser according to claim 1 and a
5 method of storing confectionery articles according to claim 10.

Background of the invention

Several types of confectionery dispensers, also referred to as vendoring machines
within the art, have been provided over the last hundred years.

10

One problem of the existing confectionery dispensers is that the dispensers are
restricted to deal with articles having certain shapes or certain volume characterizing
sizes. Typically, such vendor machines require a certain degree of disorder in order
to obtain a reliable output.

15

It is an object of the invention to provide a confectionery dispenser, which may
sustain typical environmental influence, such as weather and vandalism, and which
may handle edgy articles in a reliable and user-friendly way.

20 **Summary of the invention**

The invention relates to a confectionery dispenser (100) comprising at least two
confectionery article (11) magazines (12),

each said confectionery article magazine (12) comprising a magazine outlet being
25 coupled with at least one confectionery article dispenser outlet (13), preferably one,
by means of at least one magazine discharge arrangement

said magazine discharge arrangement comprising at least one confectionery article
fitting compartment (19, 20, 21) adapted for performing a movement relative to said
30 magazine outlets upon activation of an activation arrangement (101) and thereby
transferring at least one confectionery article (11) comprised in at least one

confectionery article magazine (12) to said magazine outlet (13) or to at least one output compartment (A, B, C)

5 According to the invention, an advantageous magazine fed vendor machine has been obtained.

In an embodiment of the invention, said confectionery article magazines (12) being exchangeable

10 According to a preferred embodiment of the invention, the dispenser may simply be refilled by exchange of emptied or partly emptied magazines by means of pre-filled magazines.

15 It should be noted that the relative movement may of course be obtained by the movement of the magazines, the articles fitting compartments alone or both in combination.

20 In an embodiment of the invention, said output compartment (A, B, C) being mechanically coupled with said at least one outlet (102) and thereby facilitating a transfer of at least one confectionery article (11) upon activation of said activation arrangement (101).

25 In an embodiment of the invention, said activation arrangement (101) is manually driven

In an embodiment of the invention, said activation arrangement (101) is automatically driven

30 In an embodiment of the invention, said article comprising chewing gum packages (11).

In an embodiment of the invention, said magazine discharge arrangement comprising at least one confectionery article fitting compartment (19, 20, 21) being rotatable upon activation by said activation arrangement.

- 5 In an embodiment of the invention, said magazines (12) being fitted to the dispenser (100) in a substantially vertical direction thereby obtaining a gravity facilitated emptying of the magazines into the lower compartments (19, 20, 21) when activating the magazine discharge arrangement.

- 10 In an embodiment of the invention, said magazines being fitted in a substantially circular profile, when seen from above.

In an embodiment of the invention, the magazines (12) define the orientation of the magazine contained article (11).

15

In an embodiment of the invention, the magazines (12) are substantially translucent, thereby facilitating that a user of the dispenser may visually see at least some of the magazine contained articles (11), preferably most of the articles.

- 20 In an embodiment of the invention, the magazines (12) are arranged within a substantially translucent housing (206).

- Moreover, the invention relates to a method of storing confectionery articles (11), preferably chewing gum packages, in a confectionery dispenser (100), said dispenser
25 (100) comprising at least one user activation arrangement (101) communicating with at least one confectionery discharge arrangement, said at least one confectionery discharge arrangement adapted for discharge of confectionery articles (11) into an outlet (102) under user control by means of said user activation arrangement (101) and whereby said confectionery articles being fed to said discharge arrangement by
30 means of at least two confectionery article (11) holding magazines (12).

According to a preferred embodiment of the invention, the orientation of the articles stored in the dispenser may controlled, simply by adapting the shape of the article to the magazines or vice versa.

- 5 According to the invention, the articles should fit into the magazines and thereby ensure that the packaging is orientated completely in the desired way, thereby facilitating that the design of the article packages may be presented in a predetermined way.
- 10 In this way, the dispenser may in fact be adapted for use with several different types of packages, as the design of the packaging may in fact be the only product describing means.

- 15 Preferably, a package should be comprised in a magazine with for example the front side oriented outwardly during the complete discharging of the magazine. It should however be noted that magazine design may in fact predetermine a varying orientation during the magazine discharging.

- 20 In an embodiment of the invention, the magazines (12) define the orientation of the magazine contained articles (11).

In an embodiment of the invention, the stored articles are visible or at least substantially viable to a user of the dispenser (100)

25

The drawings

The invention will now be disclosed with reference to the drawings, of which

- 30 fig. 1a to 1c illustrate the principles of discharging a magazine fed-dispenser according to a preferred embodiment of the invention,

5

fig. 2 illustrates main components of a dispenser according to a preferred embodiment of the invention in perspective, and where

fig. 3 illustrates a dispenser according to the invention in a perspective view.

Detailed description

Fig. 1a- to 1c and fig. 2 illustrate a preferred embodiment of a confectionery dispenser according to the invention. Preferably, the relevant confectionery
5 comprises chewing gum packages 11.

The illustrated dispenser comprises nine magazines 12. The magazines 12 contain chewing gum package rows 1,2,3,4,5,6,7,8 and 9. According to the illustrated embodiment, each magazine 12 contains seven packages as from the beginning. It
10 should be noted that almost any other number of packages may be applied within the scope of the invention.

The shown flat-view cross-sections illustrate the cross-section of the magazines 12, when the magazines are arranged upside-down and in a circle in a typical vendor
15 machine. The real three-dimensional arrangement of the magazine is illustrated in fig. 2.

The magazines 12 communicate with a magazine discharge arrangement comprising three compartments 19, 20, 21 adapted for transferring of a confectionery article
20 from a magazine to an intermediate compartment A, B or C.

According to the invention, practically any number from 1 and above of the compartments 19, 20, 21 may be applied within the scope of the invention.

25 Moreover, practically any number from 1 and above of the intermediate compartments A, B and C may be applied within the scope of the invention.

The function of the three compartments 19, 20, and 21 may be illustrated in fig. 1a to 1c. The three compartments 19, 20, 21 initially contain three confectionery packages
30 111, 112, 113. According to a preferred embodiment of the invention, the dispenser should preferably dispense exactly one confectionery article 11 each time the

dispenser is activated by a user. Evidently, practically any other number may be applied within the scope of the invention. If the number is two, the three compartments of the present embodiment should be able to hold two articles 11 instead of the one illustrated, 111, 112, 113.

5

Moreover, the above-mentioned intermediate compartment C contains a confectionery article 114 and the compartments A and B are empty.

When an (not shown) activation arrangement is activated, manually or automatically
10 by a user, the compartments 19, 20, 21 and the intermediate compartments A, B and C are rotated.

The rotating movement of the two layers of compartments 19, 20, 21; A, B, C results in that the package 114 is rotated from left to right. As illustrated in fig. 1b, the initial
15 result of this movement is that the article 112 contained in the compartment 19 is transferred from compartments 19 to the intermediate compartments B under influence by the rotating compartments and gravity. At the same time the article 114 is also rotated from left to right.

20 It should be noted that the magazines may be rotated in any suitable way according to the invention, including right to left.

In fig. 1c, the article 114 is released from the compartment C to the outlet 13 and moreover, again under influence of gravity, the row of articles 7, pushes a new
25 confectionery article into the compartment 19, and the dispenser is now ready for a new dispensing operation.

It should be emphasised that the discharge of packages 11 may for example be
30 discharge resulting means.

It should be noted according to the illustrated preferred embodiment of the invention that the magazines are emptied from left to right, that is the row of articles 7 is emptied at first, then row 8, row 9, row 1, etc. until the last row 6.

- 5 According to the invention, this kind of controlled emptying is strongly preferred, partly due to the fact that the initially emptied magazines 12 may be located at the least visible side of the dispenser. Moreover, and very important, the magazines are emptied one at a time, thereby making the refilling somewhat easier due to the fact that the partly emptied magazines will never exceed one. Thereby, refill may be
10 performed preferably by means of full magazines.

According to a preferred embodiment the illustrated magazines may be exchanged completely by pre-filled magazines 12.

- 15 It should also be noted that the illustrated embodiment may preferably be utilized for dispensing of chewing gum packages.

- It should also be noted that the invention is in particular advantageous in combination with edged articles due to the fact that the edged articles may be
20 somewhat difficult to control when transferring the articles from a prior art container to the outlet of the dispenser.

Evidently, the dispenser may also even be utilized for dispensing of rounded articles.

- 25 Moreover, the invention facilitates a magazine-wise emptying which is quite important when dealing with, for instance, confectionery articles having a limited shelf life. In this way, it is possible to establish and keep track of the age of the articles.
- 30 Preferably, the illustrated dispenser may be activated by means of e.g. a coin-receiving interface, and preferable the dispenser is adapted for use at public places.

According to a preferred embodiment of the invention, the orientation of the articles 11 stored in the dispenser may controlled, simply by adapting the shape of the article to the magazines or vice versa.

5

According to the invention, the articles should fit into the magazines and thereby ensure that the packaging is orientated completely in the desired way, thereby facilitating that the design of the article packages may be presented in a predetermined way.

10

In this way, the dispenser may in fact be adapted for use with several different types of packages, as the design of the packaging may in fact be the only product describing means.

15 Preferably, a package should be comprised in a magazine with for example the front side oriented outwardly during the complete discharging of the magazine. It should however be noted that magazine design may in fact predetermine a varying orientation during the magazine discharging.

20 Fig. 2 illustrates a corresponding three-dimensional view of the dispenser as illustrated in fig. 1a to 1c. The illustrated dispenser comprises nine magazines 12 of which only two are illustrated on fig. 2.

25 The magazines 12 are contained in dispenser housing comprising an upper part 206, preferably translucent, which may be locked to a foundation 207 by means of an upper lock 204, mechanically lockable to the foundation by means of a lock member 205.

30 Confectionery articles 11 may be contained in the magazines 12 and the magazines may be founded to a circular foundation 201 while fitting to corresponding downstream openings 202.

A magazine discharge arrangement comprises article-holding compartments 19, 20, 21. An article 11 is illustrated when slipping into the compartment 21.

- 5 An opening 203 serves as a discharge arrangement output into the compartments A, B and C and finally the compartments communicate with an outlet (not shown).

For a full description of the feed-through mechanism, please refer to the above explanation of fig. 1a to fig. 1c.

10

It should be noted, that one of the two rotatable compartment systems 19, 20, 21 and A, B, C may in fact be omitted while still obtaining an advantageous emptying of the magazines.

- 15 However, the illustrated two-step lock-like emptying system is preferred in order to counteract environmental impact on the articles, vandalism, etc.

According to the invention, a low cost confectionery dispenser has been provided due to the fact that dispenser mechanism may be established by simple and
20 inexpensive means.

Fig. 3 illustrates the outer visible parts of a dispenser 100 comprising activation means 101 and an article outlet 102.

- 25 Preferably the upper part 206 of the dispenser 100 is translucent as mentioned in fig. 2.

The dispenser comprises a user interface in the form of a rotatable grip 101, which may be manually activated while inserting payment (such as coins) and the resulting
30 output may be retrieved at the outlet 102.

Preferably, the illustrated dispenser may be activated by means of e.g. a coin-receiving interface integrated in said grip 101, and preferable the dispenser is adapted for use at public places.

Claims

1. Confectionery dispenser (100) comprising at least two confectionery article (11)
5 magazines (12),
- each said at least two confectionery article magazines (12) comprising a magazine
outlet being coupled with at least one confectionery article dispenser outlet (13),
preferably one, by means of at least one magazine discharge arrangement
- 10 said magazine discharge arrangement comprising at least one confectionery article
fitting compartment (19, 20, 21) adapted for performing a movement relative to said
magazine outlets upon activation of an activation arrangement (101) and thereby
transferring at least one confectionery article (11) comprised in at least one
- 15 confectionery article magazine (12) to said magazine outlet (13) or to at least one
output compartment (A, B, C)
2. Confectionery dispenser (100) according to claim 1, wherein
said confectionery article magazines (12) being exchangeable
- 20 3. Confectionery dispenser (100) according to claim 1 or 2, wherein
said output compartment (A, B, C) being mechanically coupled with said at least one
outlet (102) and thereby facilitating a transfer of at least one confectionery article
(11) upon activation of said activation arrangement (101).
- 25 4. Confectionery dispenser (100) according to any of the claims 1-3, wherein
activation arrangement (101) is manually driven
5. Confectionery dispenser (100) according to any of the claims 1-4, wherein
- 30 activation arrangement (101) is automatically driven

6. Confectionery dispenser (100) according to any of the claims 1-5, wherein said article comprising chewing gum packages (11).

7. Confectionery dispenser (100) according to any of the claims 1-6, wherein
5 said magazine discharge arrangement comprising at least one confectionery article fitting compartment (19, 20, 21) being rotatable upon activation by said activation arrangement.

8. Confectionery dispenser (100) according to any of the claims 1-7, wherein
10 said magazines (12) being fitted to the dispenser (100) in a substantially vertical direction thereby obtaining a gravity facilitated emptying of the magazines into the lower compartments (19, 20, 21) when activating the magazine discharge arrangement.

9. Confectionery dispenser (100) according to any of the claims 1-8; wherein
15 said magazines being fitted in a substantially circular profile, when seen from above.

10. Confectionery dispenser (100) according to any of the claims 1-9, wherein the
20 magazines (12) define the orientation of the magazine contained article (11).

11. Confectionery dispenser (100) according to any of the claims 1-10, wherein the
25 magazines (12) are substantially translucent, thereby facilitating that a user of the dispenser may visually see at least some of the magazine contained articles (11), preferably most of the articles.

12. Confectionery dispenser (100) according to any of the claims 1-11, wherein the
30 magazines (12) are arranged within a substantially translucent housing (206).

13. Method of storing confectionery articles (11), preferably chewing gum packages,
30 in a confectionery dispenser (100), said dispenser (100) comprising at least one user activation arrangement (101) communicating with at least one confectionery

14

discharge arrangement, said at least one confectionery discharge arrangement adapted for discharge of confectionery articles (11) into an outlet (102) under user control by means of said user activation arrangement (101) and whereby said confectionery articles being fed to said discharge arrangement by means of at least
5 two confectionery article (11) holding magazines (12).

14. Method of storing confectionery articles (11) according to claim 13, whereby the magazines (12) define the orientation of the magazine contained articles (11).

10 15. Method of storing confectionery articles (11) according to claim 13 or 14, whereby the stored articles are visible or at least substantially viable to a user of the dispenser (100)

Abstract

The invention relates to a confectionery dispenser (100) comprising at least two confectionery article (11) magazines (12),

5



each said confectionery article magazine (12) comprising a magazine outlet being coupled with at least one confectionery article dispenser outlet (13), preferably one, by means of at least one magazine discharge arrangement

- 10 said magazine discharge arrangement comprising at least one confectionery article fitting compartment (19, 20, 21) adapted for performing a movement relative to said magazine outlets upon activation of an activation arrangement (101) and thereby a transferring at least one confectionery article (11) comprised in at least one confectionery article magazine (12) to said magazine outlet (13) or to at least one
- 15 output compartment (A, B, C)

According to the invention, an advantageous magazine fed vendor machine has been obtained.

20

1/4

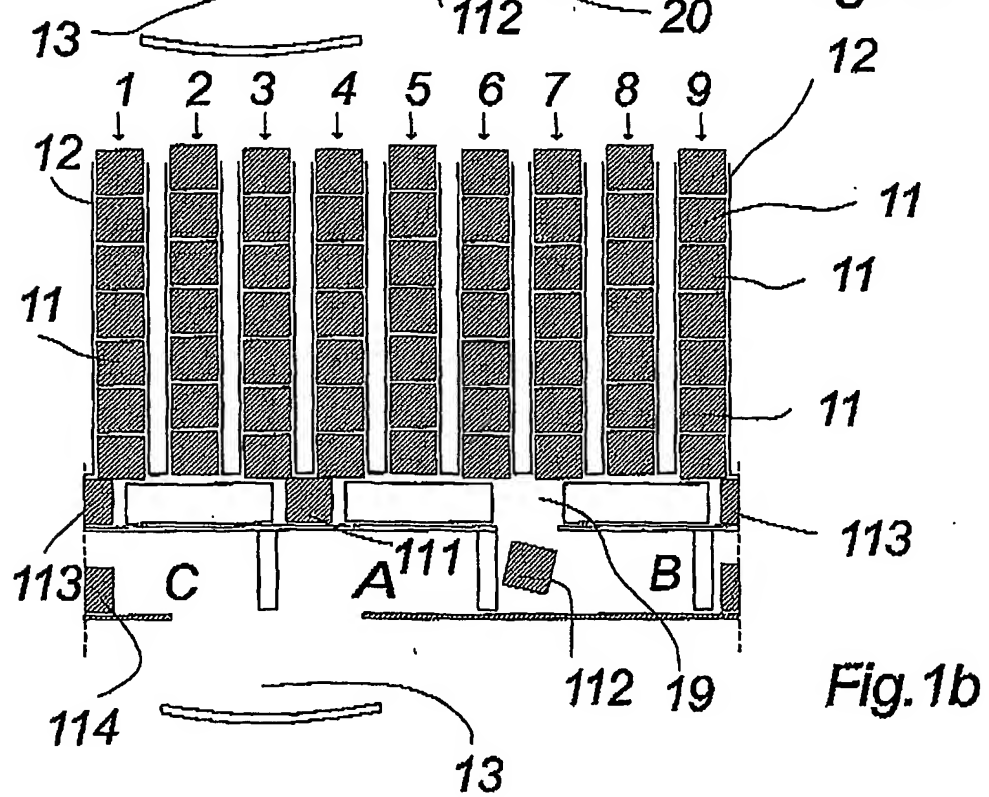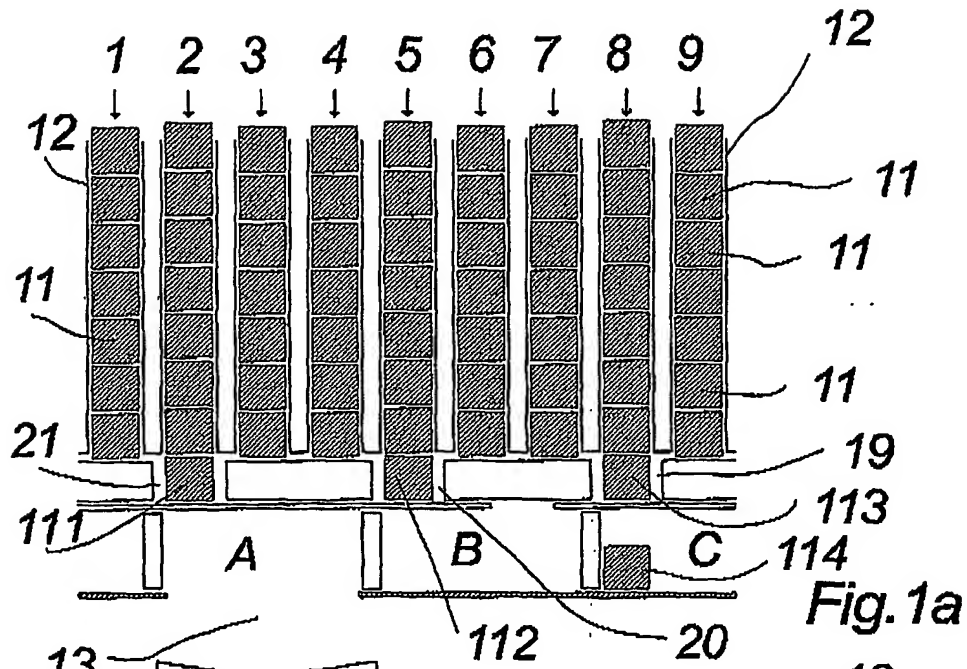

2/4


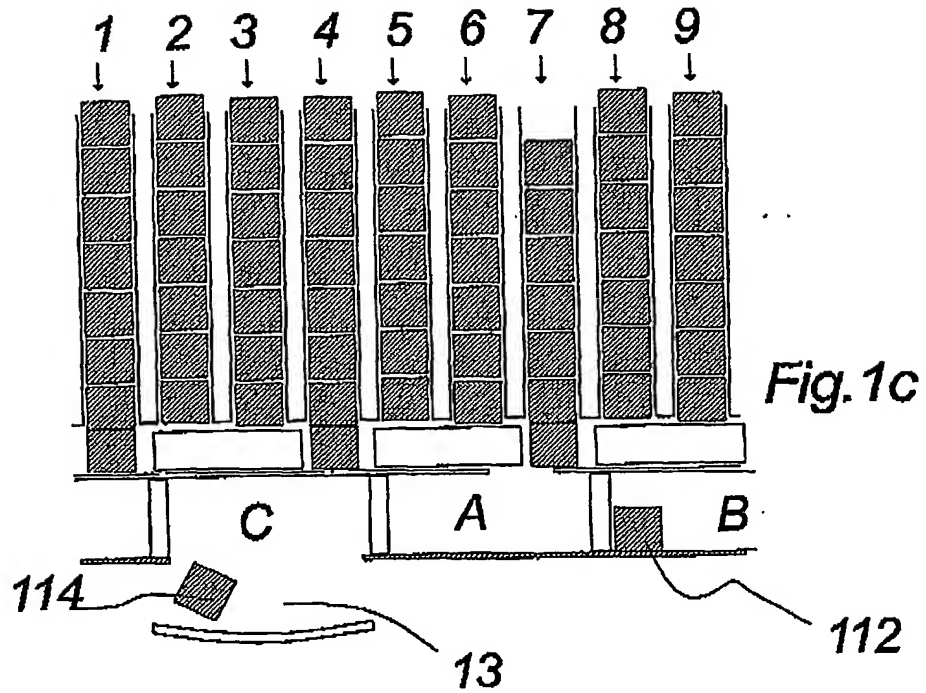


Fig. 1c

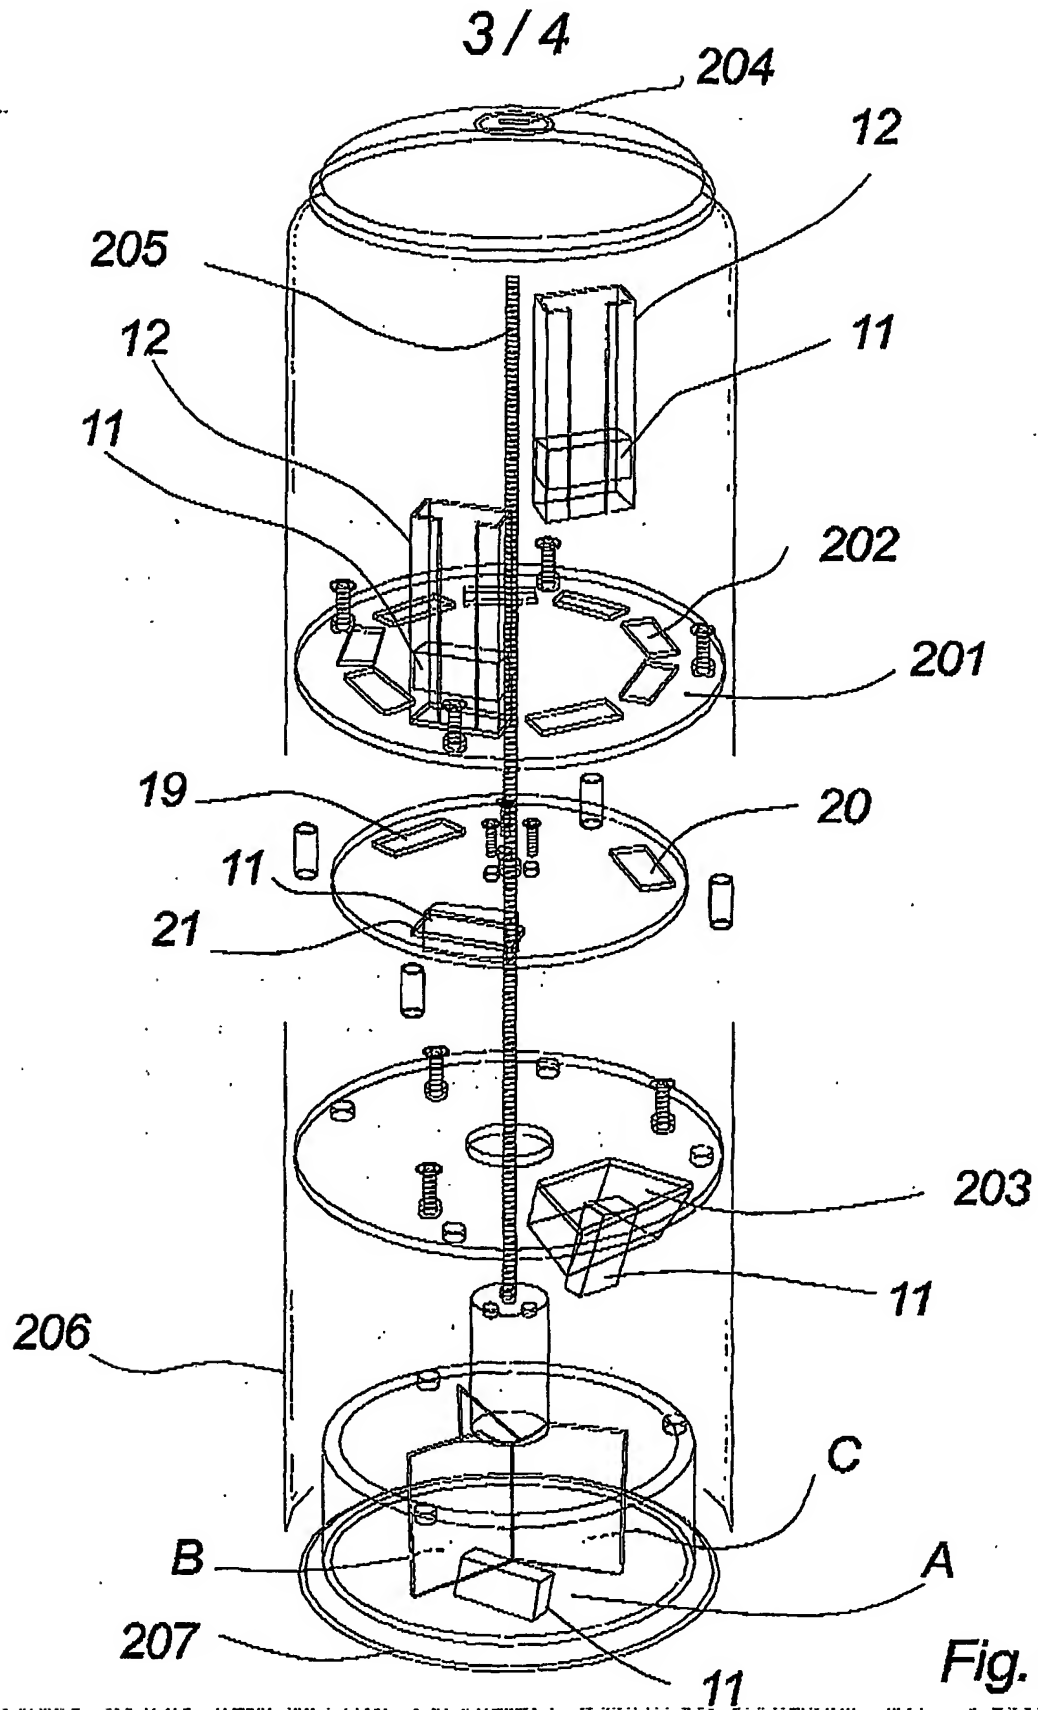

4/4

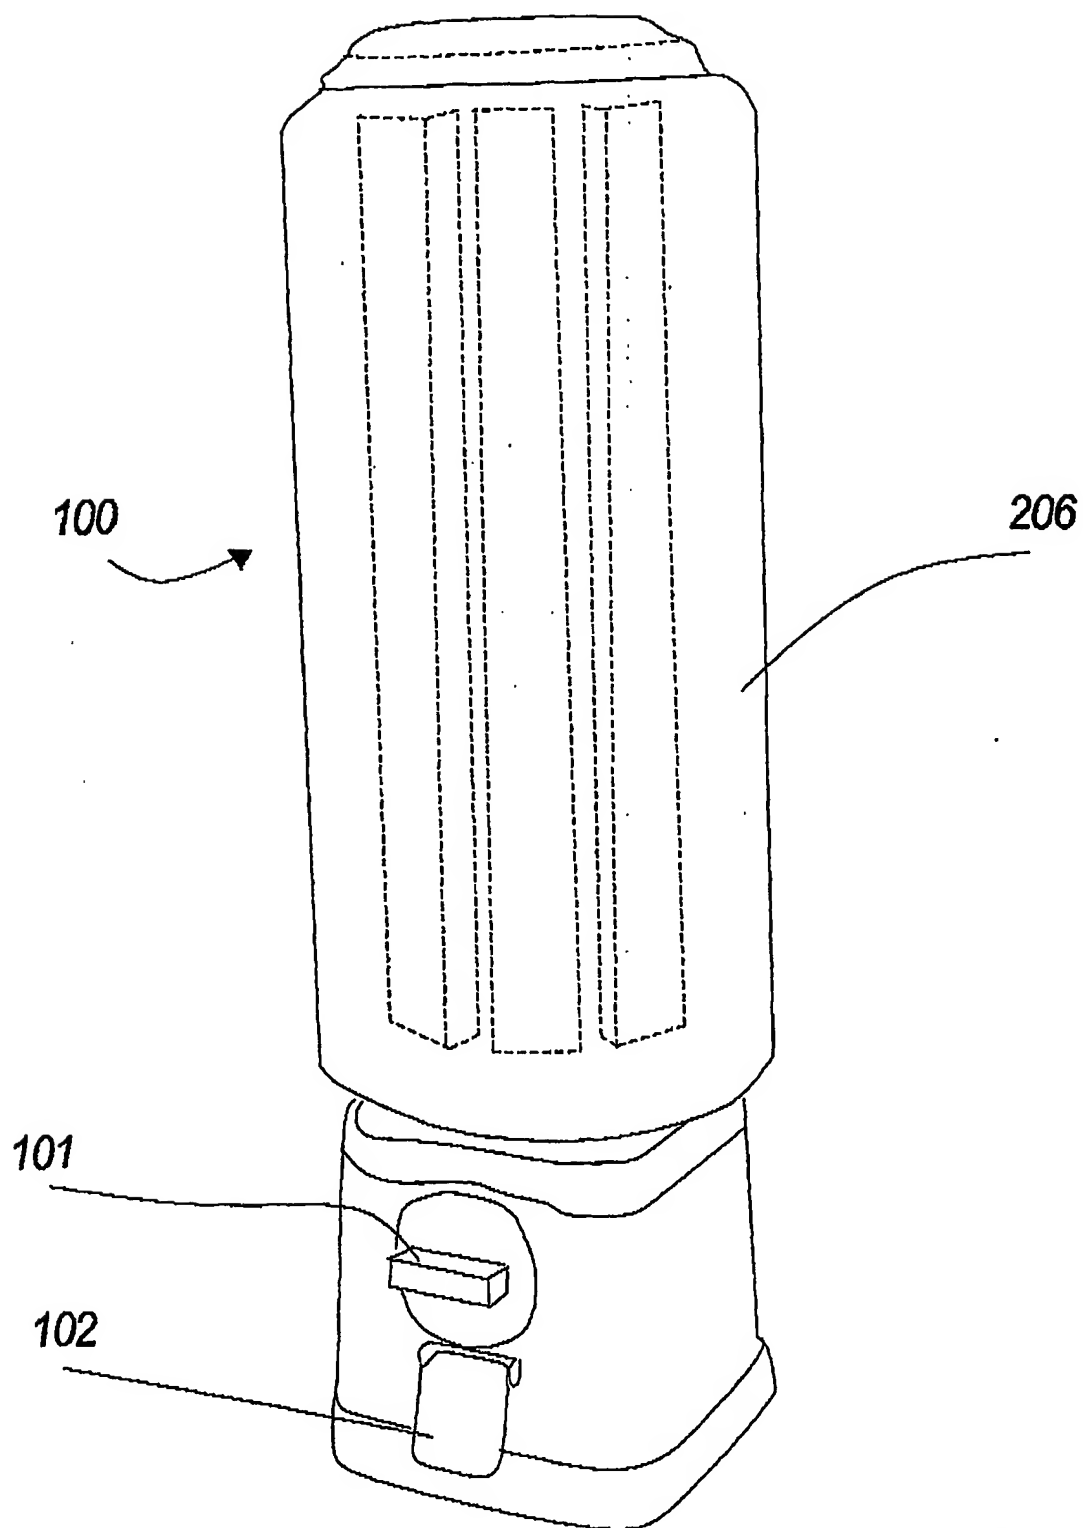


Fig. 3

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.